



## CCA0A.\*\*\*.I

**20.5W – Continuous duty – ED100%**

**Plastic Encapsulation**

### Description & Operation


External plated metal cage and shims to maximize electromagnetic output. Metal parts protected against oxidation according to RoHS directive. Bore size: Ø13.1 mm. Suitable for HEAVY DUTY operations..




### Technical Data

Power	20.5W
Various Voltage Options Available	Both AC and DC
Coil Insulation Class	F (180°C)
Wire Insulation Class	H (200°C)
ED	100%
Supply Power Tolerance	±10%DC; +10% -5%AC
Ambient Temperature Range	only -40°C, 80°C
Weight	0.19kg


### Dimensional Drawing

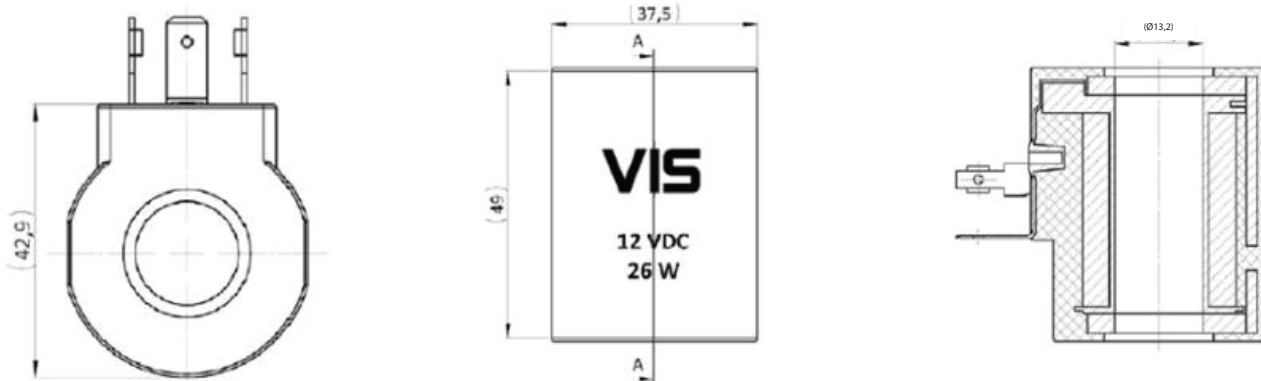

 **Performance Details**

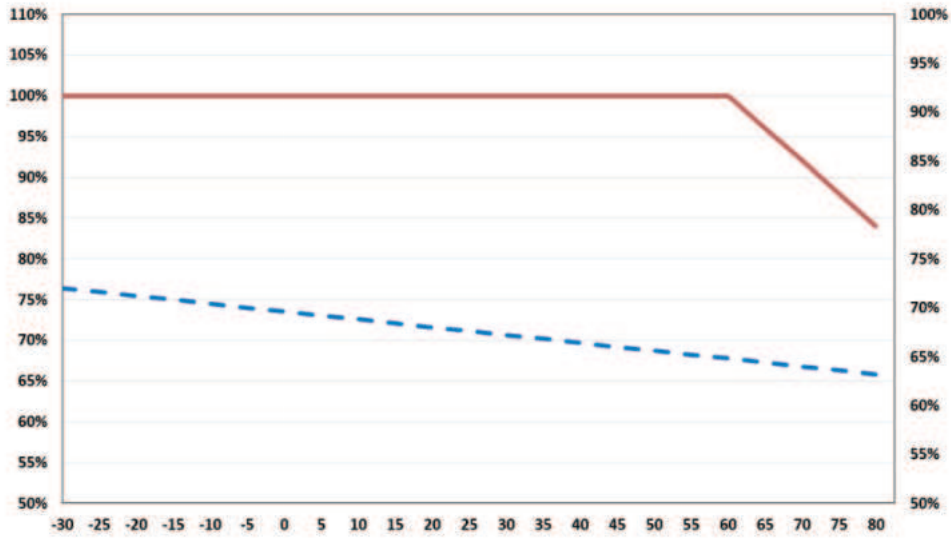

 **Ordering Code**

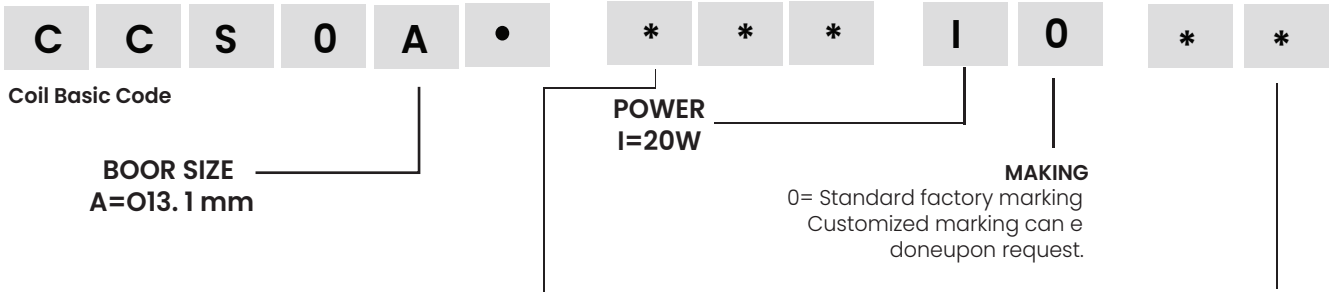

**TYPE OF CURRENT**  
 C= Direct current  
 R=Alternate current  
 \*Please not alternate current coils have to be supplied with rectified current.

Model Code	Type of Connector
00	DIN 43650
01	Flying Lead (200mm)
05	AMP Junior
08	DEUTSCH ((90°)
13	KOSTAL (24X1)
17	Dual Spade