

# CYLINDRIC DOUBLE PILOT OPERATED CHECK VALVE




## VBPDE CYL

**Flow Upto 45 LPM**  
**Pressure 350 Bar**

### Description & Operation

Pilot check valves are used to block the cylinder in both directions. Flow is free in one direction and blocked in the reverse direction until pilot pressure is applied. Cylindrical type instead of the standard one (parallelepiped).

Connect V1 and V2 to the pressure flow and C1 and C2 to the actuator.

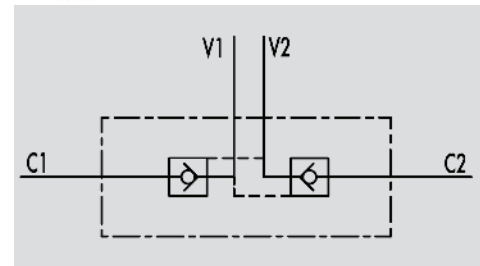

Hydraulic Symbol


### Technical Data

Maximum Flow	45 LPM
Maximum Pressure	350 Bar
Body Material	Steel
Internal parts	Hardened and Ground steel
External Component treatment	Zn/Fe - standard (96h) / Zn/Ni (720h)
Oil Temperature	50 Deg. C
Fluids	Mineral based or synthetics with lubricating properties
Viscosity	30 cSt
Standard Sealing	NBR-Buna N
Filtration	20/18/15 ISO 4406 ( Max. Filtration admitted)
Orientation / Mounting	Inline
Weight	See Ordering details


### Specifications

Type	Pilot Ratio	Max.Flow	Max.Pressure	Cr.Pressure
		LPM	Bar	Bar
VBPDE 3/8" CYLINDER	1:5	45	350	3

 Performance Curve

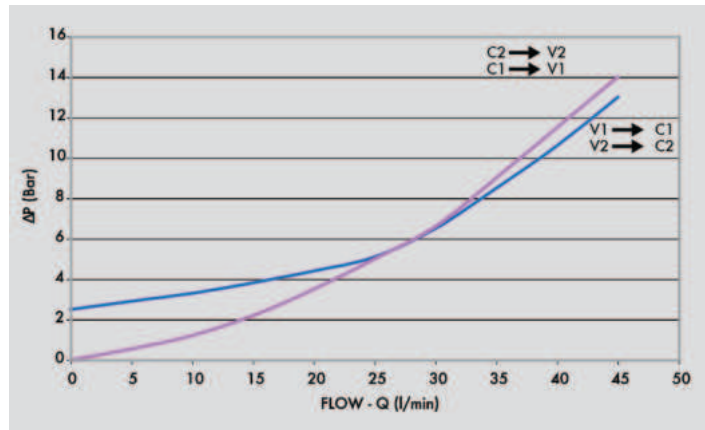

 Dimensional Drawing

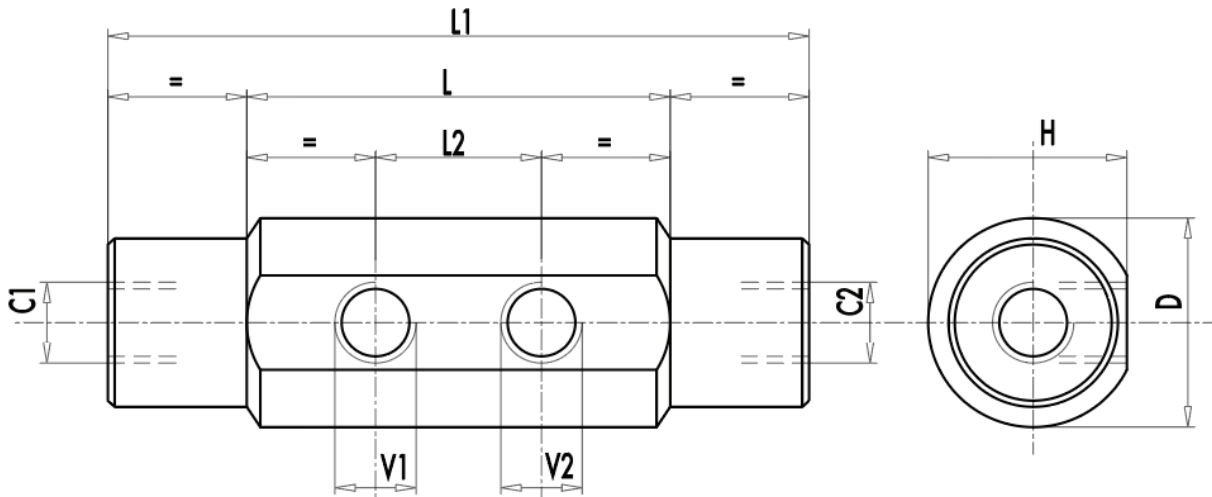

 Ordering Details

Code	Type	V1-V2/C1-C2	L	L1	L2	H	D	Weight
		GAS	mm	mm	mm	mm	mm	Kg
R-V0055	VBPDE 3/8" CYLINDER	G 3/8"	100	156	41	44	Ø48	1.634